

INDOOR/OUTDOOR MODEL



Requires a NextUp Main Locker for operation. Shown with optional custom branded locker wrap and cage tarps.



Secure, 24/7 pickup for oversized orders

NextUp indoor/outdoor cages let you offer secure, anytime pickup for oversized and palletized orders, while you optimize order fulfillment and labor efficiency. Their powerful ApexIQ™ software and simple APIs offer easy integrations to existing software to provide seamless data insights and complete your digital order chain of custody.

- Provides fast, frictionless pickup for oversized orders.
- Enables after-hours pickups without added labor.
- Optimizes labor and reduces lines at the service desk.
- ApexIQ software provides actionable insights for continuous improvement.

FEATURES

- » **Scalable and modular design**
Increase cage size with 3- or 5-foot extension kits and connect up to 6 cages to increase capacity.
- » **Door swing options**
Choose left or right hinges to ensure required clearance.
- » **Optional roof kit**
Sturdy galvanized roof panels shield cage items from sun and weather.
- » **Requires a NextUp Smart Pickup Locker**
One Main Locker controls up to 6 cages and adds capacity for smaller items.

ApexIQ Software

Scalable, enterprise-grade ApexIQ software enables shorter dwell times and optimal utilization

ApexIQ easily integrates with your ERP, POS, SNS and mobile app. It provides data visibility at a single location or across your enterprise, for optimal efficiency and a seamless customer experience. And it helps create a digital chain of custody for every order.



Enhanced order fulfillment processes

- Notifications are sent by your brand or third-party service
- Customer-defined dwell times for proactive lockdown and reclaim

API integrations for seamless experiences

- Flexible integration with customer systems and processes
- Enables end-to-end digital order chain of custody
- Real-time order status updates
- Enhanced scalability and deployment options

Temporary Offline Failover

- Ensures seamless customer pickup during brief losses of internet connection
- Transactions execute locally then synchronize with paired cloud instance when internet connection is restored

Big data analytics and insights


- Data and visibility across your enterprise
- Insights into order completion time, dwell time, order pickup time, and more
- Helps verify courier service metrics



Create your ideal NextUp cage system

1 START WITH A MAIN LOCKER

Lockers include required touchscreen and keypad.

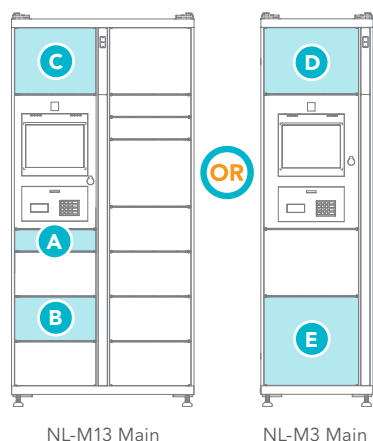


NL-M13 Main

NL-M3 Main

2 ADD UP TO SIX 5x5 CAGES*

Right- or left-hand swing doors available.

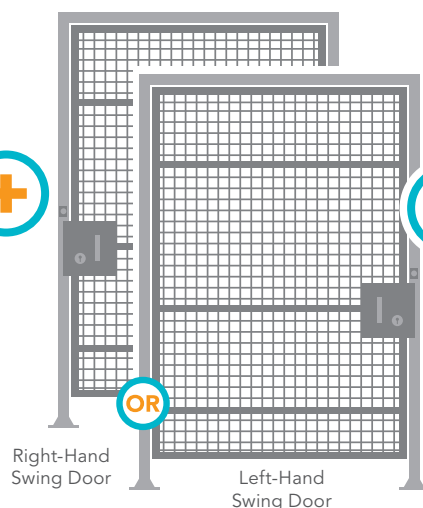


Right-Hand Swing Door

Left-Hand Swing Door

3 ADD DEPTH WITH EXTENSION KITS**

Optional 3' and 5' kits available.

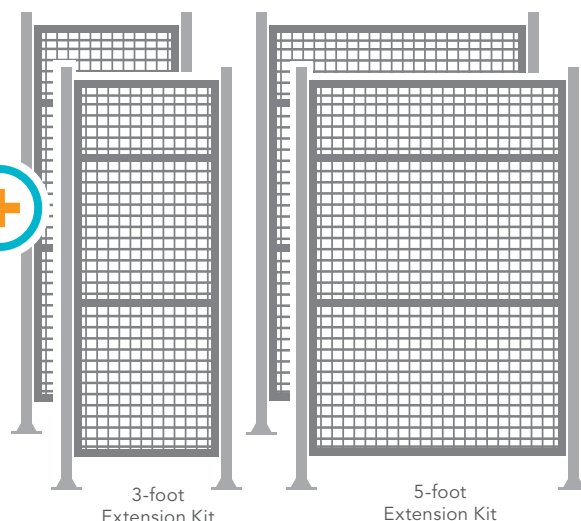

3-foot Extension Kit

5-foot Extension Kit

Locker Compartment Interior Size Key (W x H)

A) 14.25" x 3.75" / 362 mm x 99 mm

B) 14.25" x 8.5" / 362 mm x 216 mm

C) 14.25" x 13.25" / 362 mm x 337 mm

D) 17" x 13.25" / 432 mm x 337 mm

E) 17" x 17.8" / 432 mm x 452 mm

NOTE: All compartments have an interior depth of 24.2" / 615 mm.

*One Main Locker will also control up to 3 Satellite Lockers per cage system.


**Only one extension of either size can be added when using roof panels. See sales rep for details.

4 ADD AN OPTIONAL VINYL CAGE TARP & LOCKER WRAP

Choose from one of our standard cage tarp and locker wrap designs or create your own custom design for an additional charge. See sales rep for details.



Example of standard locker wrap and cage tarp.

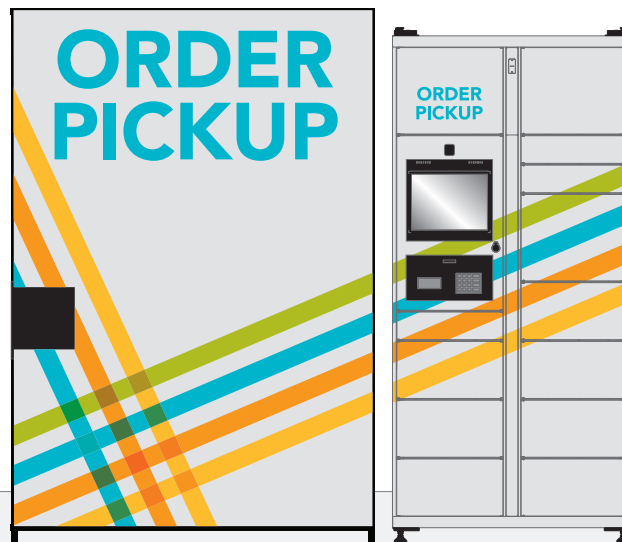

Example of custom locker wrap and cage tarp.

NextUp Cage, Indoor/Outdoor Model | SPECIFICATIONS

| 5' x 5' Cage Specifications | | |
|---|-----------------------------------|----------|
| Exterior Dimensions (W x H x D) | Interior Clearance (W x H x D) | Weight |
| 66" x 92.5" x 67" | 52.5" x 88.5" x 51.5" | 500 lbs. |
| 2350 mm x 2200 mm x 11702 mm | 1336 mm x 2248 mm x 1308 mm | 227 kg |
| NOTE: Optional 3' and 5' roof kits available and recommended for outdoor use. Consult your sales rep for details. Cage(s) ships flat. | | |

NextUp Locker Specifications

» [CLICK HERE](#)

Cage Material/Finish

- Cage: Electrocoating (KTL) with black powder topcoat to prevent corrosion. (Tested to ISO/DIN12944.)
- Roof Panels: Galvanized aluminum in premium matte black.

Operating Specifications

- Ambient operating temperature range: -4° F/-20° C to 140° F /60° C
- Ambient Operating humidity range: 10 to 90% condensing

Location Guidelines

- Cages are rated for both indoor and outdoor use. Roof or structural covering recommended for outdoor use.
- Cages must be level and anchored to concrete.

- Power and network outlets must be accessible without moving the equipment.
- Door clearance required: 5'/1524 mm

Internet Guidelines

- An internet connection is required. Broadband wired connection is preferred, or cellular router.
- 1 Main locker can operate one cage system on a single internet line.
- NextUp systems continue to operate for pick ups during brief internet outages using Temporary Offline Failover.

Main Locker Material/Finish

- Anti-corrosive powder-coated galvanized sheet/electro-static powder coat.

Main Locker Electrical

- 120 VAC, 60 Hz / 230 VAC, 50 Hz
- 300 Watts
- Operates 1 Main locker, up to 6 cages, and up to 3 Satellite lockers on a single power supply.
- Ethernet connection is required.
- Main locker ships with 6'/1882 mm power cord.
- Power input is three conductor, single phase.
- Cables for Europe, the UK, and Australia available upon request.



Apex Order Pickup Solutions reserves the right to change specifications appearing in this document without incurring any obligation for equipment previously or subsequently sold.